



CUSTOMER SERVICE IS AVAILABLE MON-FRI 9AM-6PM EST



800-589-5592

WWW.SPRINGWELLWATER.COM

Whole House Cartridge Replacement CWH-1, CWH-2, and CWH-3










Carbon Cartridge



2 Replacement O-Rings



2 Silicone Lubricants

System Contents CWH-2






5 Micron Sediment Salt Free Cartridge



Carbon Cartridge



2 Replacement O-Rings



2 Silicone Lubricants

System Contents CWH-3






5 Micron Sediment Salt Free Cartridge



Carbon Cartridge



VOC/Lead Cartridge



3 Replacement O-Rings







3 Silicone Lubricants



Installing a shut off valve ahead of your Whole House Cartridge System makes maintenance easier.



No shut off valve? Shut off the water to the home prior to replacing the cartridges.



Use the QR Code on your system to order replacement cartridges.

Whole House Cartridge Replacement CWH-1, CWH-2, and CWH-3

Removing the Old Cartridges

Required parts and tools.



Spanner Wrench



Bucket (Recommended)



1) No shut off valve? Turn off the water to the home prior to changing the cartridges.



2) If you have a shut off valve, use it to turn off the water flow to the Whole House Cartridge System.



3) Open the cold water valve on a bath tub faucet to purge any pressure from your system.



4) It is recommended to use a bucket to catch water spillage when replacing cartridges.



5) Slide the spanner wrench over one of the cartridge casings and turn it counter-clockwise to loosen it. Repeat with each cartridge casing.



6) Unscrew each cartridge casing by turning it counter clockwise until it is fully removed.



7) Remove the old cartridge and discard it into the bucket.




8) Repeat with all cartridge casings. Remove and discard the old cartridges.



9) All cartridge casings and cartridges removed.

Whole House Cartridge Replacement CWH-1, CWH-2, and CWH-3

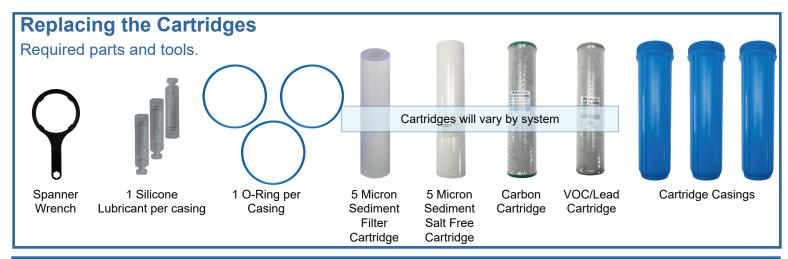



10) Remove the packaging from each cartridge.



11) Insert each cartridge into a cartridge casing.



12) Cartridges will be slightly recessed when properly seated inside the cartridge casing. Repeat with all cartridges and cartridge casings.



13) Apply silicone lubricant to the O-ring at the top of the cartridge casing. 1 lubricant is provided per cartridge. Repeat with each cartridge casing.



14) Use a finger to evenly spread the silicone lubricant around the O-ring. Repeat with each cartridge casing.



15) Insert the cartridge casing w/cartridge into it's designated position (Listed on Mounting Bracket) and thread by turning clockwise.



16) Use the spanner wrench to fully tighten the cartridge casing w/cartridge.



17) Repeat with each cartridge casing w/ cartridge. The cartridges are now replaced.



18) Restore the water to the home and allow water to flush through your new cartridges for 10 minutes.

4